



Connectors



- Wedge Connectors for copper and aluminum conductors
- Grounding connectors
- Shear bolt splices and terminals

HV Terminations



- 69 kV Heat Shrink Terminations
- 69 - 138 kV Dry Type
- 138 - 245 kV Oil filled
- GIS Terminations

LV Cable Accessories



- Both heat shrink and cold applied technology available
- Specially formulated gel technology
- Raychem heat shrink tubings

MV Cable Terminations 5-35kV



- Heat shrink and cold applied technology available
- Advanced stress control technology
- Raychem material innovation
- GIS Terminations

MV Cable Splices 5-35kV



- Heat shrink and cold applied technology available
- All in one designs available
- Raychem material innovation

HV Splices




- Premolded one piece joint body
- Torque controlled conductor bolt or crimping sleeve alternative for conductor connection
- Solderless connection or plumbing alternatives for grounding

Arresters



- Station class porcelain up to 500 kV
- Intermediate and Station Class Polymeric up to 230 kV
- Transmission Line Arresters up to 345 kV

Insulators

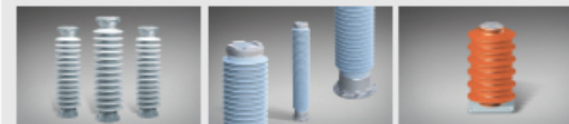


- Polymeric, porcelain, and hollow core station post
- Insulators for rail applications
- Raychem polymer tension, line post and station post

Rubber Goods



- Residential and wind farm load break and dead break elbows
- Rubber accessories available

Wildlife & Asset Protection

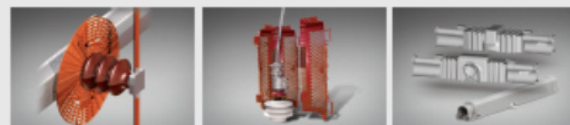

- Substation asset protection
- Overhead Raptor Protectors
- Creepage extenders

MISCELLANEOUS



- Street lighting controls and timers for OEM, Utility and Industrial applications
- Measuring instrumentation and protection
- Instrumentation transformers - current and voltage; low voltage and medium voltage