



METAL CLAD, TECK90, FLEXIBLE CORDS & TRAY CABLES

OMNICACABLE
EMPOWERING DISTRIBUTION®

TC

TC GLOBALLY APPROVED, HAZARDOUS (CLASSIFIED) LOCATION CABLE GLAND

SUPERIOR CABLE ACCEPTANCE RANGE

- Listed for tray cable and flexible cord
- Listed for ordinary and hazardous locations
- Suitable for NEC, CEC and IEC installation
- Material options: aluminum, nickel plated brass and stainless steel

TMC2

TMC2 GLOBALLY APPROVED, HAZARDOUS (CLASSIFIED) LOCATION CABLE GLAND

SUPERIOR CABLE ACCEPTANCE RANGE



- Listed for metal clad (MC/MC-HL) & TECK90 cables
- Listed for ordinary and hazardous locations
- Suitable for NEC, CEC and IEC installation
- Material options: aluminum, nickel plated brass and stainless steel

TMC2X

TMC2X GLOBALLY APPROVED, HAZARDOUS (CLASSIFIED) LOCATION EXPLOSIONPROOF CABLE GLAND

SUPERIOR CABLE ACCEPTANCE RANGE

- Listed for metal clad (MC/MC-HL) & TECK90 cables
- Listed for ordinary and hazardous locations
- Suitable for NEC, CEC and IEC Installation
- Material options: aluminum, nickel plated brass and stainless steel
- RapidEx liquid pour seal - reduces time, risk and cost - (included in package)

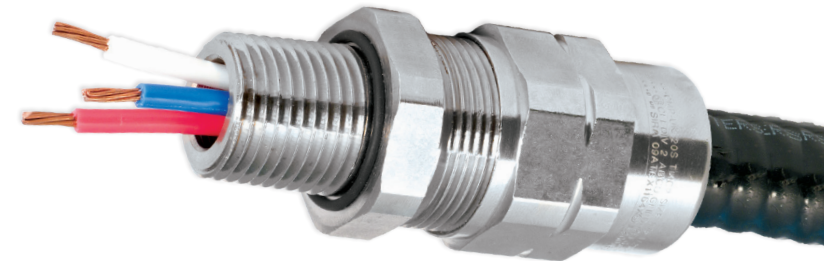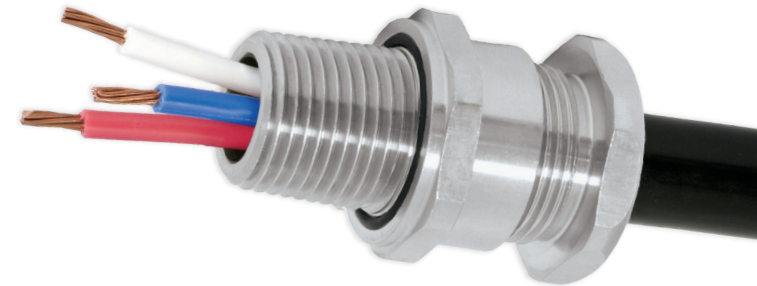




METAL CLAD, TECK90, FLEXIBLE CORDS & TRAY CABLES

OMNICACABLE
EMPOWERING DISTRIBUTION™

TC

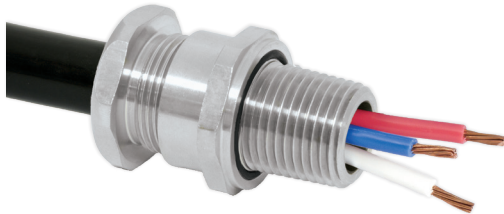


TRAY CABLE CONNECTOR

- Smaller length and profile
- Aluminum, nickel plated brass or stainless steel design
- Heavy duty design
- Supplied with galvanized mild steel locknut (1/2" - 1")
- Halogen free seal material (-76° to +230°F)
- Alternative thread sizes available
- Globally marked, cCSAus, IECEx & ATEX
- Easily disconnected and re-usable
- Available from stock (aluminum & nickel plated brass only)
- For explosionproof applications CMP offers PXSS2K series connector for non-armored cables.



TMC2

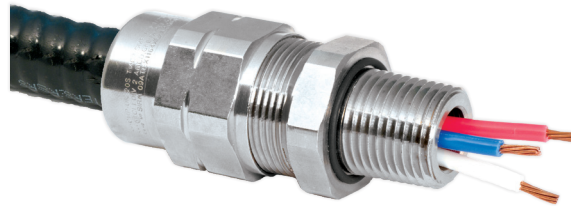

SUPERIOR CABLE ACCEPTANCE RANGE

- Simplified two-part design
- Compact slim profile
- Built-in armor measuring guide
- Independent sealing and armor clamping
- Simple, sequential installation process
- Equipment interface 'O' ring seal as standard
- Alternative thread sizes available
- 360° grounding spring (non-magnetic)
- Supplied with galvanized mild steel locknut (1/2" - 1")
- Halogen free seal material (-76° to +230°F)
- Globally marked, cCSAus, IECEx & ATEX
- Easily disconnected and re-usable
- Available from stock (aluminum & nickel plated brass only)



TMC2X



SIGNIFICANTLY REDUCES INSTALL TIME, RISK & COST

- RapidEx liquid pour sealing system:
 - Enhances reliability, reduces risk
 - Reduces man hours
 - Reduces cost
- Installs 75% faster than traditional sealing glands
- RapidEx liquid pour seal ensures perfect seal
- Cures completely in under 1 hour
- Compact slim profile
- Built-in armor measuring guide
- Independent sealing and armor clamping
- Simple, sequential installation process
- Simplified two-part design
- 360° grounding spring (non-magnetic)
- Halogen free seal material (-76° to +185°F)
- Globally marked, cCSAus, cULus, IECEx & ATEX
- Available from stock (aluminum & nickel plated brass only)



FREE COMPREHENSIVE INSTALLATION TRAINING AVAILABLE

