


Speed Link SLK Locking Device

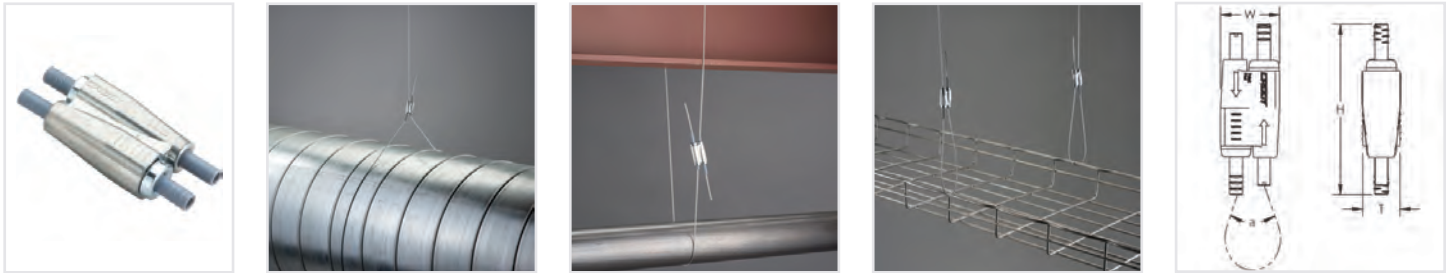


- Push/pull keyless release allows easy adjustments
- Suitable for 1.5 mm and 2 mm Speed Link cable
- Low-profile locking device minimizes visual impact
- Cable spread of 90 degrees allows positioning the device closer to the load
- Keyless release tubes are easy to operate while wearing gloves
- Double-sided locking mechanism enables simple height adjustment

Material: Steel, Polypropylene, Zinc alloy

Part Number	Wire Rope Diameter	Height H	Width W	Thickness T	Angle a
SLK2C200	1.5 – 2.0 mm	2.15"	0.75"	0.5"	90° Max
SLK2C50	1.5 – 2.0 mm	2.15"	0.75"	0.5"	90° Max
SLK3C200	3.0 mm	2.50"	0.90"	0.6"	90° Max
SLK3C50	3.0 mm	2.50"	0.90"	0.6"	90° Max

Locking device is only to be used with SLC15L50MSP, SLC15L1000SP and SLC2L1000SP wire spools or 1.5 mm and 2 mm Speed Link accessories. Do not use with any other wires.

Speed Link LD Locking Device

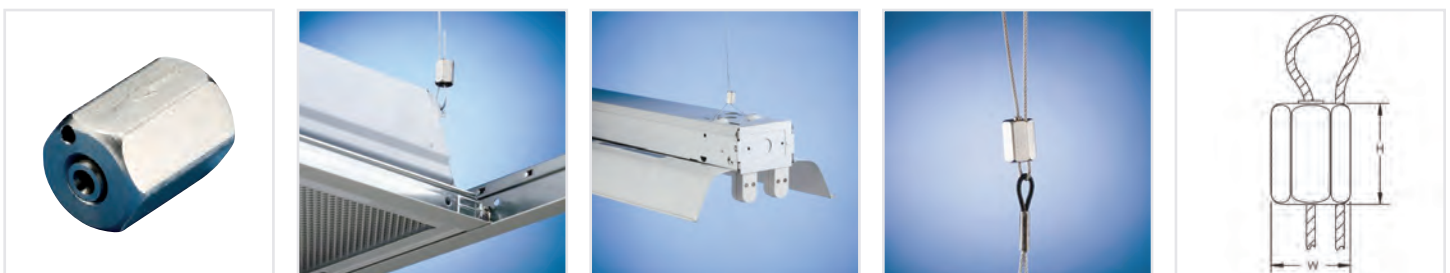

- Low-profile locking device minimizes visual impact
- Suitable for 1.5 mm Speed Link cable

Material: Stainless steel 304

Part Number	Wire Rope Diameter	Height H	Width W
SLJR200	1.5 mm	0.75"	0.5"
SLS2C50	2 mm	2.1"	0.63"
SLS3C50	3 mm	2.1"	0.80"

The 1.5 mm locking devices are only to be used with the SLC15L1000SP and SLC15L50MSP wire spools, or any other 1.5 mm Speed Link accessories. Do not use with any other wires.