



Speed Link SLS with Threaded Stud End

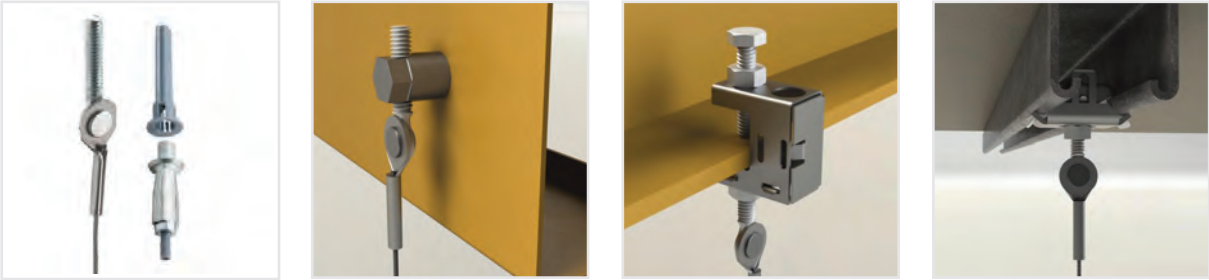

- Complete system includes wire, locking device and pre-assembled threaded stud end fitting
- Attaches to structures with threaded anchors or devices with threaded hole

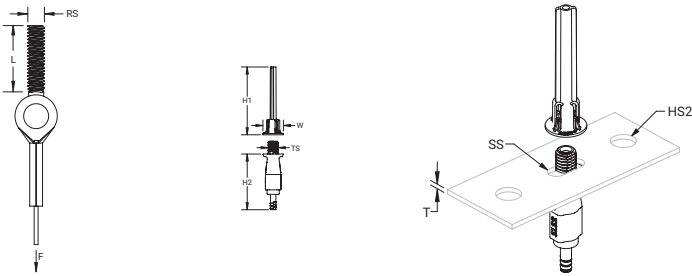

Material: Steel; Polypropylene; Zinc Alloy
Finish: Electrogalvanized
Static Load Safety Factor: 5:1
Wire Rope Diameter: 2 mm



Part Number	Wire Rope Length	Rod Size RS	Screw Length L	Static Load F
SLS2L2SE250	6.6'	1/4"	1"	60 lb
SLS2L3SE250	9.9'	1/4"	1"	60 lb
SLS2L5SE250	16.4'	1/4"	1"	60 lb

Thread Size TS	Height 1 H1	Height 2 H2	Width W	Thickness T	Hole Size 2 HS2	Slot Size SS
M8	2.1"	1.7"	0.63"	0.15" Max	0.31" – 0.38"	0.31" x 0.25" - 0.31" x 0.38"

The 2 mm locking device is compatible with C-Channel Types E0 and E0L.
Total load per wire on a multi-tier trapeze must not exceed static load.