

Speed Link SLS with Wedge Anchor


- Complete system includes wire, locking device and wedge anchor from Powers Fasteners, Inc.
- Quickly and easily attaches into cracked and non-cracked concrete
- No special tools required
- ETA-13/0106 approval available for wedge anchor from Powers Fasteners, Inc.

Material:
Steel; Polypropylene; Zinc Alloy

Finish:
Electrogalvanized

Static Load Safety Factor:
5:1

Wire Rope Diameter:
2 mm

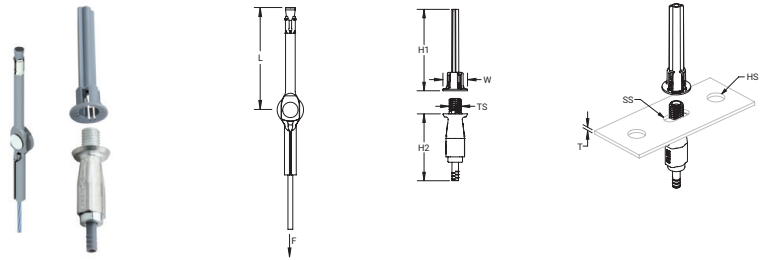

Part Number	Wire Rope Length	Length (L)	Drill Bit Diameter Ø	Drill Hole Depth	Static Load F
SLS2L3WA6	9.9'	2.50"	1/4"	2.4"	60 lb
SLS2L5WA6	16.4'	2.50"	1/4"	2.4"	60 lb
SLS2L7WA6	22.9'	2.50"	1/4"	2.4"	60 lb

Thread Size TS	Height 1 H1	Height 2 H2	Width W	Thickness T	Hole Size HS	Slot Size SS
M8	2.1"	1.7"	0.63"	0.15" Max	0.31" – 0.38"	0.31" x 0.25" - 0.31" x 0.38"

The 2 mm locking device is compatible with C-Channel Types E0 and E0L.

Total load per wire on a multi-tier trapeze must not exceed static load.

For minimum fastener embedment depths in concrete, please consult www.powers.com.

Uses Powers Fasteners, Inc. part number 7409SD1.

Speed Link SLK with Wedge Anchor

- Complete system includes wire, locking device and wedge anchor from Powers Fasteners, Inc.
- Quickly and easily attaches into cracked and non-cracked concrete
- No special tools required


Material:
Steel; Polypropylene; Zinc Alloy

Finish:
Electrogalvanized

Static Load Safety Factor:
5:1

Drill Bit Diameter:
1/4"

Drill Bit Depth:
2.4"

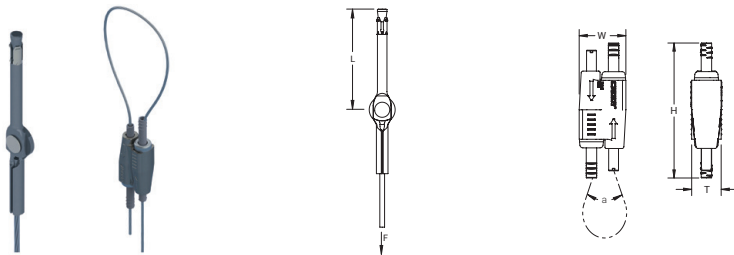

ALSO AVAILABLE

Part Number	Wire Rope Length	Length L	Height H	Width W	Thickness T	Angle a	Static Load F
Wire Rope Diameter: 2 mm							
SLK2L2WA6	6.6'	2.50"	2.15"	0.75"	0.5"	90° Max	100 lb
SLK2L3WA6	9.9'	2.50"	2.15"	0.75"	0.5"	90° Max	100 lb
SLK2L5WA6	16.4'	2.50"	2.15"	0.75"	0.5"	90° Max	100 lb
SLK2L7WA6	22.9'	2.50"	2.15"	0.75"	0.5"	90° Max	100 lb
Wire Rope Diameter: 3 mm							
SLK3L1WA6	3.3'	2.50"	2.50"	0.90"	0.6"	90° Max	200 lb
SLK3L2WA6	6.6'	2.50"	2.50"	0.90"	0.6"	90° Max	200 lb
SLK3L3WA6	9.9'	2.50"	2.50"	0.90"	0.6"	90° Max	200 lb
SLK3L5WA6	16.4'	2.50"	2.50"	0.90"	0.6"	90° Max	200 lb
SLK3L7WA6	22.9'	2.50"	2.50"	0.90"	0.6"	90° Max	200 lb
SLK3L10WA6	32.8'	2.50"	2.50"	0.90"	0.6"	90° Max	200 lb

Uses Powers Fasteners, Inc. part number 7409SD1.

For minimum fastener embedment depths in concrete, please consult www.powers.com.