


COPPER COATED GROUND ROD

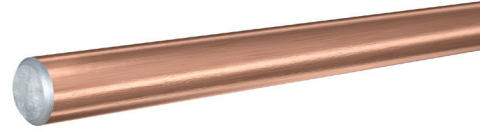

Part Number	Diameter X Length	Actual Diameter Inches	Matching Threadless Coupling	Sub / Master Bundle	Wt. Per 100	NAED UPC No. 632591-	Color Code
ROD12-8*	1/2" X 8'	0.500 - 0.510	50-TC	5 / 100	550	61138-1	Orange
ROD58-8*	5/8" X 8'	0.555 - 0.565	60-TC	5 / 100	680	61588-4	Copper
ROD58-10*	5/8" X 10'	0.555 - 0.565	60-TC	5 / 100	860	61580-8	Copper
ROD34-8*	3/4" X 8'	0.673 - 0.683	70-TC	5 / 50	1000	61548-8	Black
ROD34-10*	3/4" X 10'	0.673 - 0.683	70-TC	5 / 50	1255	61340-8	Black
ROD12-10*	1/2" X 10'	0.500 - 0.510	50-TC	5 / 100	690	61130-5	Orange

* These rods are UL Listed

- Copper coated rods have a heavy, uniform coating of copper metallurgically bonded to a rigid steel core.
- Color-coded to reduce errors.
- UL Listed rods have 10-mil minimum (254 microns) copper plating. UL/RUS models have 13-mil minimum of copper but 10-mil coating is acceptable.
- Galvan manufactures copper-coated rods under patent 6,527,934.
- Rods less than eight feet or less than 10 mils of copper, do not meet UL requirements, nor the NEC Code.
- RUS now accepts 10 mils of copper. Please see page 5.